

**EASTMAN**



# Synergex™ multifunctional amine additives for metalworking fluids

Minneapolis, MN 5/22/2018  
Caroline Johnson  
Eastman Chemical Company



- Fortune 500 specialty materials company with 2017 revenue of ~\$9.5B
- Global manufacturer and marketer of advanced materials and specialty additives
- Four business segments
- Global team of ~14,500
- Serving customers in >100 countries

A global industry **leader**

**EASTMAN**

# Today's Discussion

- A) Use of Amines in Metalworking Fluids
- B) Benefits of Alkanolamines
- C) The Synergex Product Line
- D) Synergex and Biostability
- E) Synergex and Emulsion Stability
- F) Synergex LA
- G) Conclusion

# **Use of Amines in Metalworking Fluids**


- **Amines are soluble bases that are:**
  - Less corrosive than an inorganic base
  - Compatible with O/W and W/O emulsions

**Amines are *necessary* to adjust the pH of functional fluids.**


# Benefits of Alkanolamines

# Amine choice is a *formulator's decision.*


## Examples of amines



Primary  
1°




Secondary  
2°




Tertiary  
3°


- A) Hydrophobic versus hydrophilic
- B) Volatile (odorous) versus non-VOC
- C) Alkanolamine versus alkylamine
- D) Multifunctional (e.g., corrosion inhibitor) versus pH only



Monoethanolamine




Diethanolamine



N-Methyldiethanolamine

# What are the ideal properties of an amine?

## Low odor/volatility

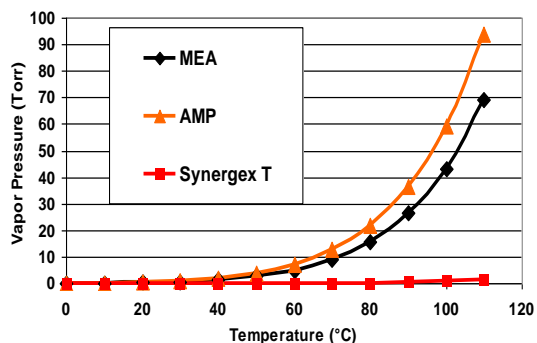


## Biostability

*Proteus mirabilis* (ATCC 7002)

TSB media, 78.5% MEA Triazine

0 ppm Amine


4000 ppm Amine

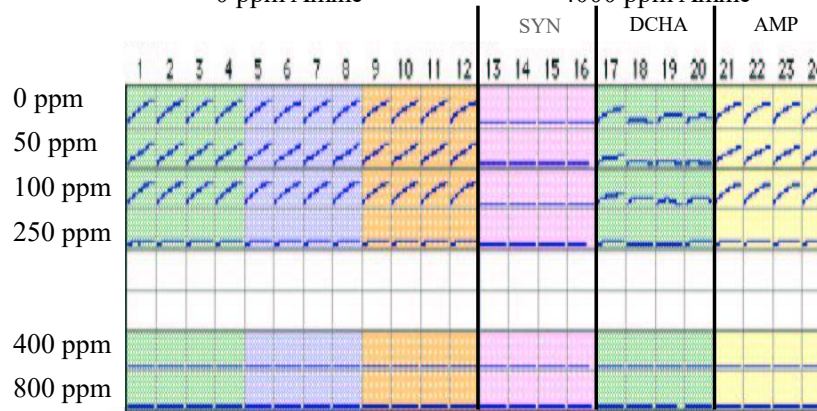

## Low staining



## Emulsion stability



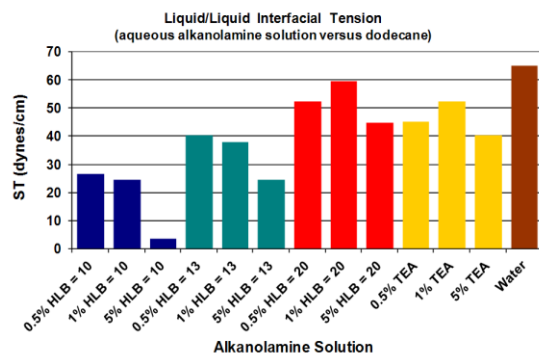




**Alkanolamines provide good base strength and capacity at a reasonable cost with low VOC contribution and low odor.**

# The Synergex Product Line

# *N*-alkyl alkanolamines (AAAs)

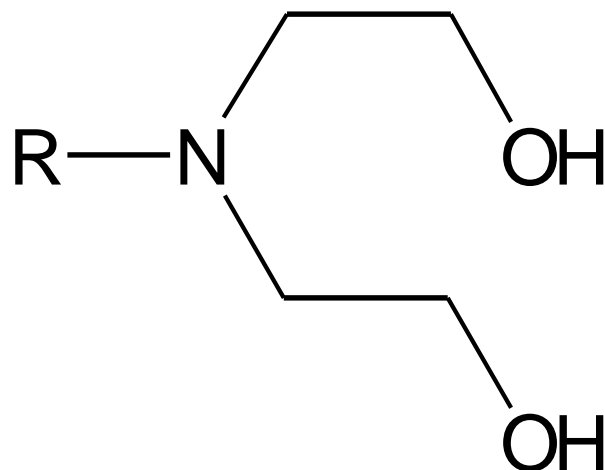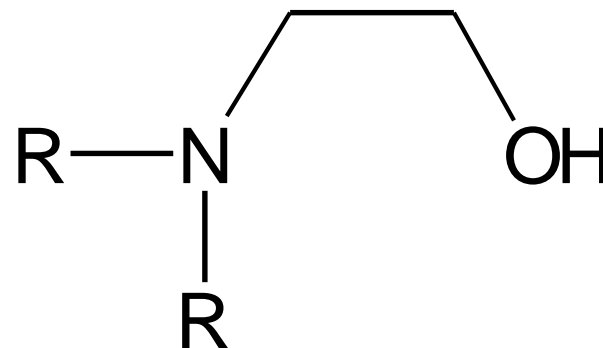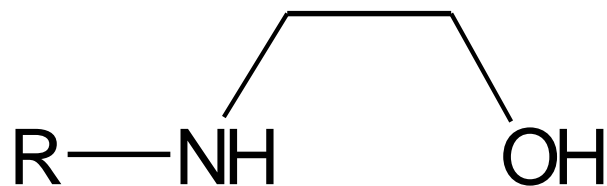

$R = C1 - C8$

# The Synergex product line

- Synergex—excellent supplementary biostability, low volatility and odor, good corrosion inhibition, colloid stabilization
- Synergex T—good supplementary biostability, tertiary amine, very low volatility and odor, colloid stabilization
- Synergex LA—capable DCHA replacement that pairs well with lower-MW primary alkanolamines such as MEA and MIPA

Amine	MW	EW	pKa	mg KOH/g	HLB	BP
Synergex T	161.24	161.24	8.9	347	12	285°C (normal)
Synergex	117.19	117.19	9.7	478	10	200°C (normal)
Synergex LA	173.30	173.30	10.3	324	6	230°C (normal)
MDEA	119.16	119.16	8.8	471	17	247°C (normal)

**MW** = molecular weight (g/mole)

**EW** = equivalent weight (g per equivalent of amine)

**pKa** = negative log of the equilibrium constant for dissociation of the protonated amine (water, RT)

mg KOH/g = mass of KOH with same number of moles as 1 gram of the amine

**HLB** = calculated floor function of  $\{60/\text{MW}\} \times 20$  for monoethoxylate and  $\{104/\text{MW}\} \times 20$  for diethoxylate

**BP** = boiling point; normal designates a pressure of 1 atmosphere

# Synergex and Biostability

# Fluid user and formulator—Working together to optimize biostability

## Emulsion fluid

▪ 100 SUS oil	72 g/kg
▪ 60% sulfonated oil	72 g/kg
▪ DEA fatty acid amide	72 g/kg
▪ Tall oil fatty acid	72 g/kg
▪ BASF 17R4	24 g/kg
▪ Triethanolamine (85%)	100 g/kg
▪ <b>Alkanolamine</b>	<b>40 g/kg</b>
▪ Water	Balance

**Add biocide.**

**Keep fluid clean.**

**Optimize formula.**

## Corrosion Inhibitors as Preservatives for Metalworking Fluids — Ethanolamines

E. O. BENNETT (Member, ASLE)  
University of Houston  
Houston, Texas 77004



*Fifty-nine monoethanolamines, diethanolamines and triethanolamines were studied for their antimicrobial properties in 13 cutting fluid products. It was found that 2-(N-onyl) ethanolamine exhibited outstanding activity in all of the products. Other compounds producing significant inhibition of microbial growth included N-methyl ethanolamine, N-ethyl ethanolamine, N-butyl ethanolamine, 2-(N-methyl-N-butyl) ethanolamine, 2-cyclohexyl ethanolamine, and N-dodecyl ethanolamine.*

### INTRODUCTION

In recent years, lubrication engineers have been confronted with the problem of increasing costs related to the formulation, procurement, maintenance, and disposal of metalworking fluids. At the same time, they have had to cope with increasing restrictions pertaining to the use of preservatives in these products.

It would be of considerable advantage if a coolant could be formulated with an ingredient which has several different functions in regards to metalworking while, at the same time, exhibiting antimicrobial properties to provide partial or complete rancidity control. In this way, it might be possible to partially control increasing costs of these lubricants as well as providing increased life under industrial conditions.

Antimicrobial agents and corrosion inhibitors constitute two important ingredients of metalworking fluids which commonly are depleted faster than the other components of the products. Quite often both of these materials must be added to a coolant at periodic intervals in order to compensate for their loss from the coolants.

Preservatives are removed from the fluid as the chemicals combine with the microbes to bring about their inhibition or death. The greater the microbial population, the more quickly they are lost from the system. Thus, the concentration of any preservative declines with time and may be reduced to subinhibitory levels in only a few weeks.

Rust inhibitors have an ability to adsorb to metal surfaces. They usually coat the metal being worked as well as the surfaces of the machine and circulation system. They sometimes even prevent the coating of metals with the oils commonly encountered in cutting fluids (1). Thus, the concentration

of the rust inhibitor in a cutting fluid also declines with time as it is removed from the system on the metal parts being worked.

It would be worthwhile then to search for chemicals which can function both as corrosion inhibitors as well as antimicrobial agents. The development of such chemicals would also have the added advantage of allowing the discontinuance of nitrites in metalworking fluids as corrosion inhibitors.

Nitrites have a number of disadvantages when used in these lubricants. They can be toxic to humans as they may produce anemia and lower blood pressure (2). They may combine with secondary amines to produce nitrosoamines which have carcinogenic properties (3). It has already been noted that a grinding fluid containing triethanolamine and nitrite may also contain nitrosoamines (4). It is also known that some of the organisms commonly found in used coolants can produce nitrosoamines from secondary amines and nitrite (5). The practical importance of these observations is still questionable at this time since nitrosoamines can be readily destroyed by a number of different organisms (6); however, there are indications that the removal of nitrites from these lubricants would improve their compatibility with human health.

Nitrites are ideal foods for microorganisms and their presence in these lubricants undoubtedly increases the problem of rancidity and corrosion control. It has been shown that 0.015 percent sodium nitrite is completely utilized by bacteria within a period of only three days (7). Thus, the removal of nitrites from metalworking fluids may possibly be a major step towards making these products more resistant to biodegradation, particularly if the only source of nitrogen in the coolant could be found in a molecule which also exhibits antimicrobial properties.

Nitrites also have been found to create environmental problems as they greatly increase the microbial populations of rivers and streams. For this reason and others, nitrites can no longer be employed in coolants used in a number of European countries (personal communication).


The idea of employing a compound which functions as a corrosion inhibitor as well as an antimicrobial agent in a lubricant is not new. More than twenty years ago, the use of

- Using amines as multifunctional additives in metalworking fluids – not a new concept
- In 1979 journal article, E.O. Bennett affirmed Synergex™ as “producing significant inhibition of microbial growth”




# *Proteus mirabilis* (ATCC 7002)

TSB media, 78.5% MEA triazine

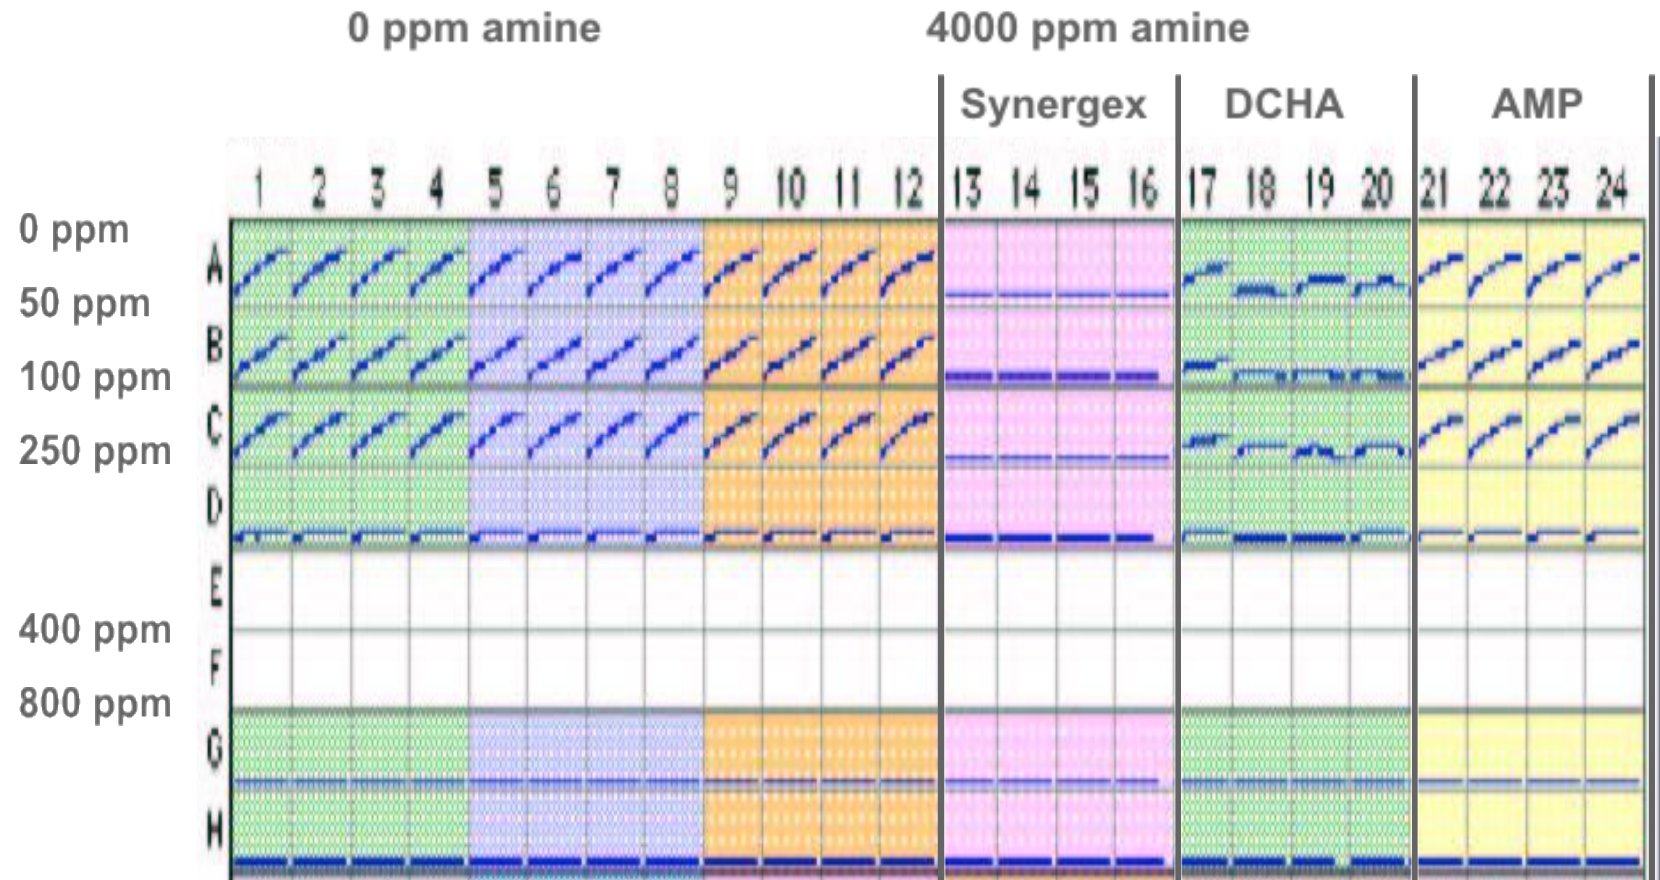

4,000 ppm amine, *Psuedomonas aeruginosa*, TSB growth slope in millOD/min, 48-hour run

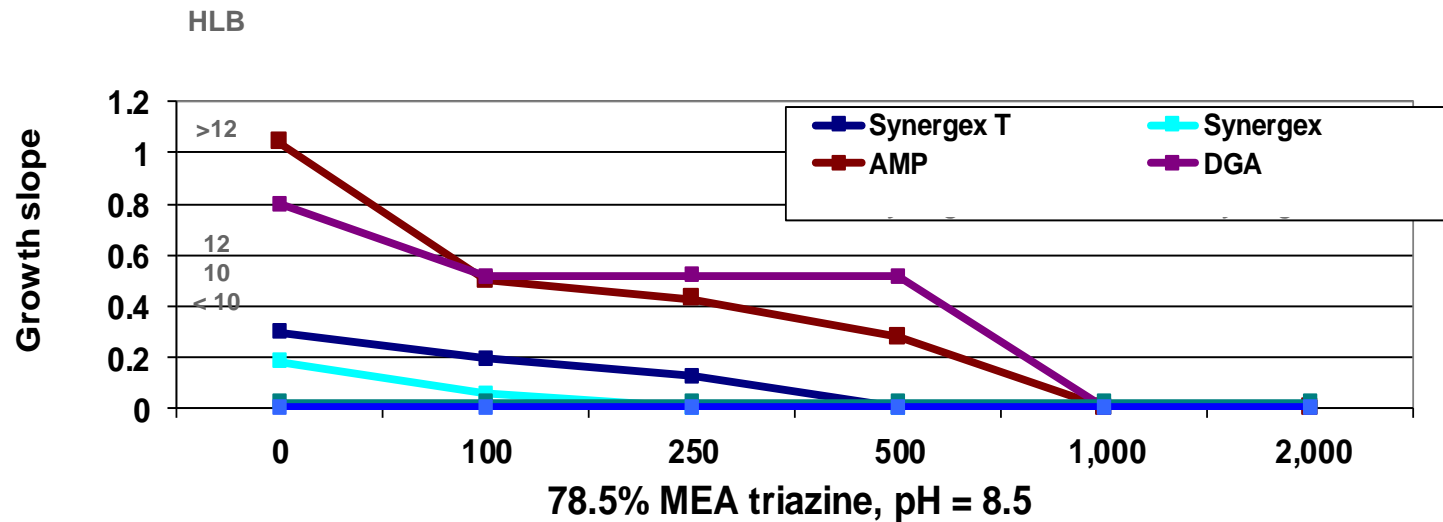


# Observations

- Synergex T can be used as part of a biostable, low-VOC metalworking fluid.
- Fluids based on the Synergex *N*-alkyl alkanolamines do not stain aluminum (AL 2024 pieces dipped in the fluids shown; MDEA for reference).




# Biocide reductions possible with Synergex products

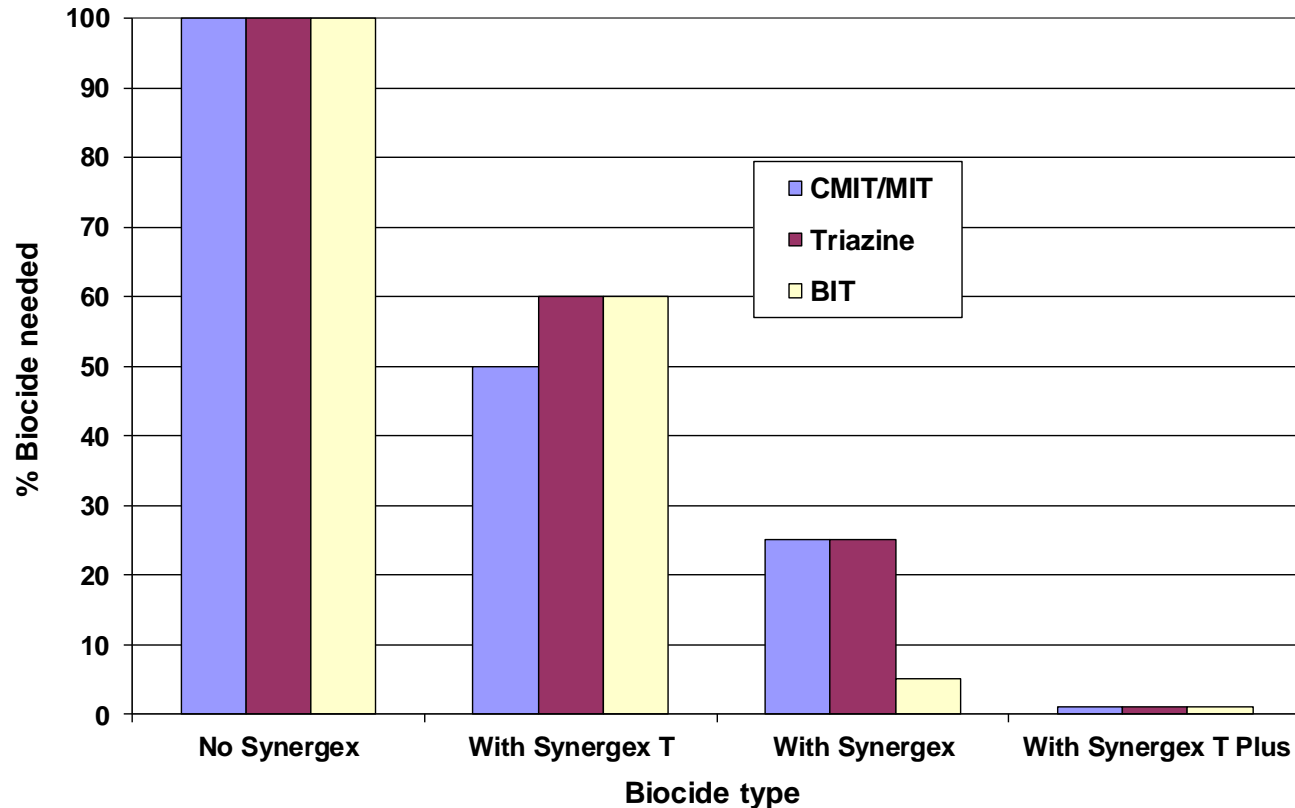

# **Synergex and Emulsion Stability**


# Emulsion basics

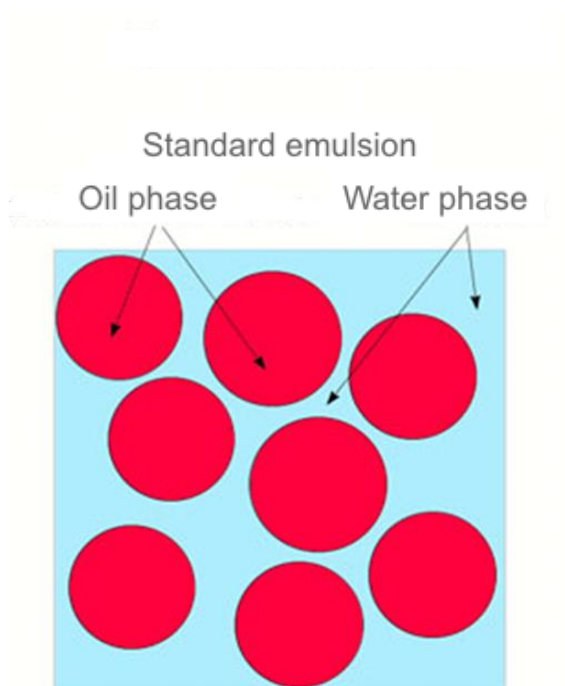

<u>Phase</u>		Dispersed phase		
		<i>Gas</i>	<i>Liquid</i>	<i>Solid</i>
Continous phase	<i>Gas</i>	None (miscible)	Aerosol (mist)	Solid aerosol (smoke, dust)
	<i>Liquid</i>	Foam	Emulsion (O/W, W/O)	Solid (dispersion)
	<i>Solid</i>	Solid foam	Gel	Solid sol

# Why is liquid/liquid interfacial tension important?


*Emulsions are destabilized by a large increase in oil/water surface area*

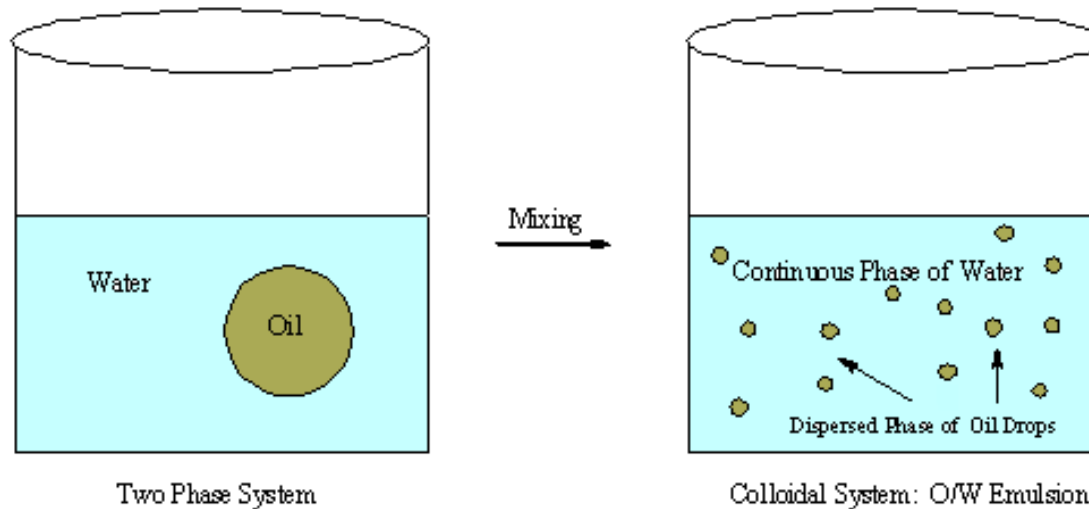

Energy difference between O/W emulsion and two separate oil and water phases

$$\Delta E = (\gamma_{\text{water/oil}}) \Delta A_{\text{water/oil}} - T \Delta S_{\text{mixing}}$$

# Liquid/liquid interfacial tension in dynes/cm

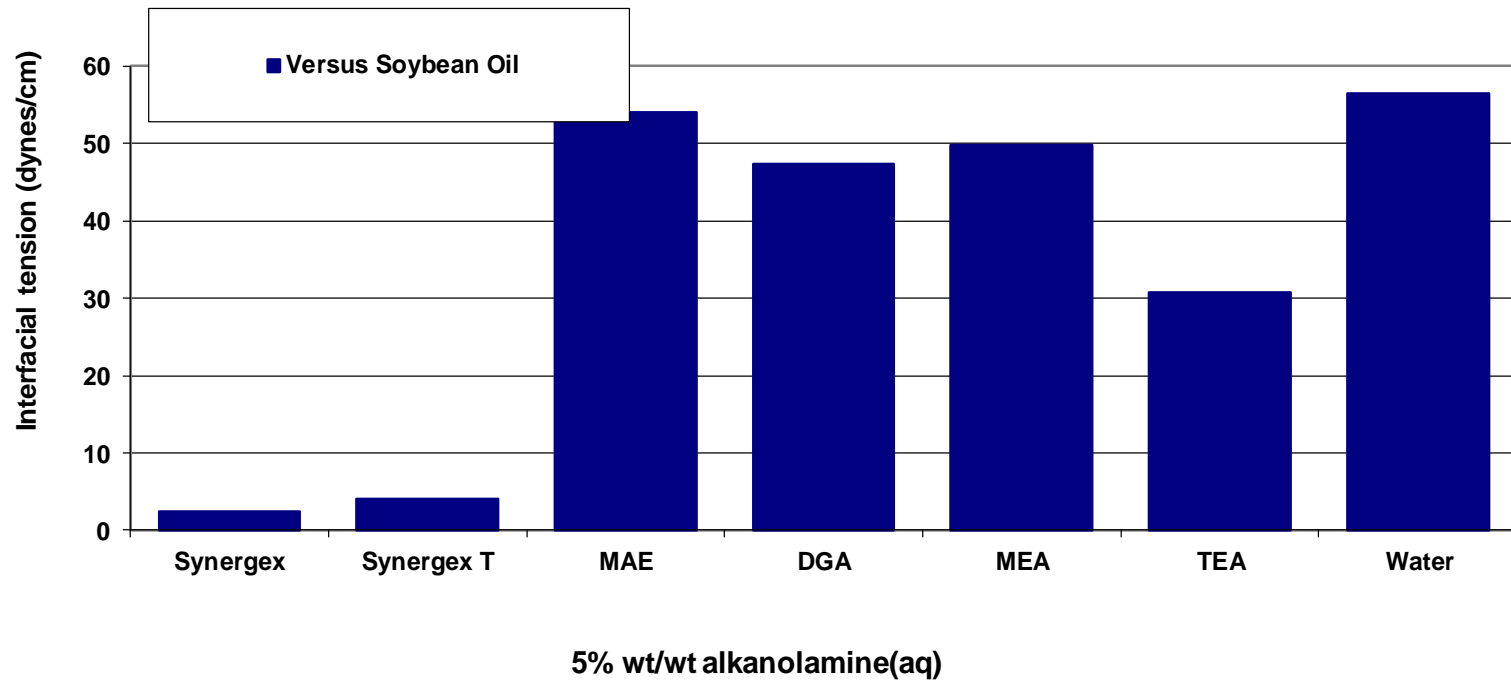



# Air/solution and air/oil interfacial tensions by bubble pressure (dynes/cm)

[ ]	SYNERGEX	SYNERGEX T	AMP	DGA	MAE	MEA	TEA
0.1%	59.8	60.1	70.4	72.1	70.7	72.3	70.2
0.5%	52.8	54.8	68.8	70.9	69.7	72.3	70.1
5%	37.9	41.0	60.6	68.0	64.6	70.6	66.6
50%	29.8	33.4	41.3	55.6	46.0	60.7	54.8
					Oil		
					Surface tension (dynes/cm)		
					Soybean oil		
					54.8		
					Methyl oleate		
					34.6		
					Dodecane		
					39.3		

# Representative liquid/liquid interfacial tension calculations

Oil/aqueous interfacial tensions ( $\gamma$ ) in dynes/cm

Solution	Oil	$\theta$ Aq	$\theta$ Oil	$\theta$ Aq/oil	$f(\theta)$	$g(\theta)$	$h(\theta)$	$\gamma$ Air/aq	$\gamma$ Air/oil	$\gamma$ Oil/aq
Water	SB	29	53	43	0.295	0.167	0.217	72.8	54.8	56.5
0.5% SYN	SB	35	53	57	0.260	0.167	0.148	59.8	54.8	43.2
0.5% MAE	SB	39	53	54	0.238	0.167	0.162	70.7	54.8	47.4
1% SYN	MeOle	36	47	44	0.255	0.197	0.212	52.8	34.6	31.3
1% AMP	MeOle	40	47	56	0.233	0.197	0.153	68.8	34.6	60.4

**SB** = soybean oil, **MeOle** = methyl oleate, **SYN** = Synergex,  
**MAE** = methylaminoethanol, **AMP** = 2a-amino-2-methyl-1-propanol

# Why is HLB important?

- The hydrophile/lipophile balance (HLB)

- Low HLB is good for corrosion inhibition and biocide synergy, but too low an HLB leads to low water solubility.
- High HLB is good for water solubility, but too high an HLB leads to poor secondary performance and poor coupling.



Mid-range HLB leads to the optimal balance of solubility and performance.

## Why do alkanolamines behave differently?

$$\text{HLB} = \frac{20 \text{ (hydrophilic molecular weight)}}{\text{(total molecular weight)}}$$

### Floor Function:

Hexane:	HLB = 00
Synergex LA:	HLB = 6
Synergex:	HLB = 10
Synergex T:	HLB = 12
AMP	HLB = 13
Methylaminoethanol:	HLB = 15
Monoethanolamine:	HLB = 20

# **Synergex LA—Newest Addition to the Line**

# Synergex LA

**EASTMAN**

As the newest addition to our Synergex product line, Synergex LA serves as an excellent hydrophobic alkanolamine for hydrophobic/hydrophilic amine combinations. **Excellent biostability and easy incorporation into O/W emulsions.**

## Formulating with the Synergex amines

Amine	NBP	% VOC	HLB	Typical use level	Mycobacterial inhibition	Oil/water partition	pKa
Synergex	200 °C	99	mid-range	4% - 6%	moderate	water	10
Synergex T	285 °C	< 8	hydrophilic	2% - 10%	none	water	9
Synergex LA	230 °C	99	hydrophobic	4% - 8%	none	oil	10

*Optimal replacement for DCHA; wise choice for formulators looking for alternatives*

**NBP** = normal boiling point

**% VOC** per ASTM-D1868

**NK** = not known

Biostability assessment via integrated MTA (microtiter assay) experiments

Mycobacterial inhibition

Typical use level designates the typically optimal amount to use in a concentration, which in turn will be diluted to = 5% in the working fluid.

# Summary

- Selection of the best amine(s) is the critical first step in formulation.
- Synergex™ alkanolamines are the optimal choice for metalworking fluids, providing biostability and enhanced emulsion stability.
- By optimizing your formula, you're ensuring formulation longevity and enhanced product performance.

# Contact

- To learn more about Synergex, visit [www.SynergexAmine.com](http://www.SynergexAmine.com).
- To place an order in North America or for more information, contact Caroline Johnson: [Car.Johnson@eastman.com](mailto:Car.Johnson@eastman.com) or one of our distributors:



U.S. West Coast/OK/TX



U.S. Midwest/East Coast



Canada



Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company (“Eastman”) and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER’S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2018 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. The ® symbol denotes registered trademark status in the U.S.; marks may also be registered internationally. Non-Eastman brands referenced herein are trademarks of their respective owners.

**Thank you!**

**Please visit us at Booth #419**